


# 3D $\Phi 3.6 \times 10$ RoHS Compliant




## 玻璃保险丝管(快断型)

### Glass Tube Fuse (Fast-Acting) 250V/125V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 <sup>2</sup> T Melting Integral (A <sup>2</sup> .S)
3D0100A/BP	100mA	250V/125V	0.0015
3D0125A/BP	125mA	250V/125V	0.0025
3D0160A/BP	160mA	250V/125V	0.0042
3D0200A/BP	200mA	250V/125V	0.0065
3D0250A/BP	250mA	250V/125V	0.010
3D0300A/BP	300mA	250V/125V	0.018
3D0315A/BP	315mA	250V/125V	0.020
3D0350A/BP	350mA	250V/125V	0.025
3D0400A/BP	400mA	250V/125V	0.035
3D0500A/BP	500mA	250V/125V	0.060
3D0630A/BP	630mA	250V/125V	0.150
3D0750A/BP	750mA	250V/125V	0.350
3D0800A/BP	800mA	250V/125V	0.5
3D1100A/BP	1A	250V/125V	0.6
3D1125A/BP	1.25A	250V/125V	1.2
3D1150A/BP	1.5A	250V/125V	1.6
3D1160A/BP	1.6A	250V/125V	1.8
3D1200A/BP	2A	250V/125V	2.4
3D1250A/BP	2.5A	250V/125V	3.2
3D1300A/BP	3A	250V/125V	6.0
3D1315A/BP	3.15A	250V/125V	7.0
3D1350A/BP	3.5A	250V/125V	7.5
3D1400A/BP	4A	250V/125V	8.0
3D1500A/BP	5A	250V/125V	15
3D1600A/BP	6A	250V/125V	24
3D1630A/BP	6.3A	250V/125V	28
3D1700A/BP	7A	250V/125V	36

Time-Current Characteristics  
电流-时间曲线图

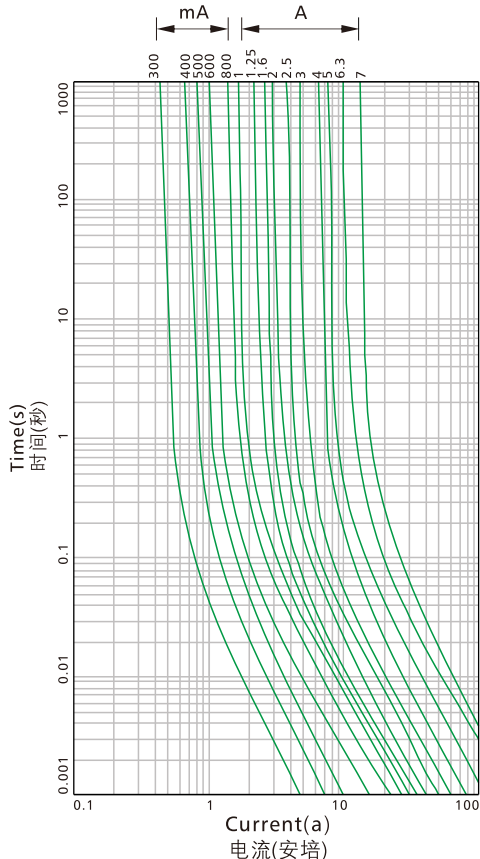

目录编号: Catalog No. A:250V B:125V

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
	100mA~7A	E221465
	100mA~7A	E221465

#### 额定分断能力:

#### Interrupting Rating:

50 Amperes at 125V AC

50 Amperes at 250V AC

#### 测试标准:

Testing Standard: UL248-14

#### 电气特性 Electrical Characteristics:

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min (大于4小时)
200%	60 s Max (小于60秒)