






3E $\Phi 3.6 \times 10$ RoHS Compliant

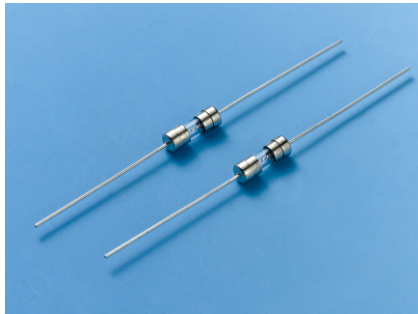

Time-Current Characteristics
电流-时间曲线图

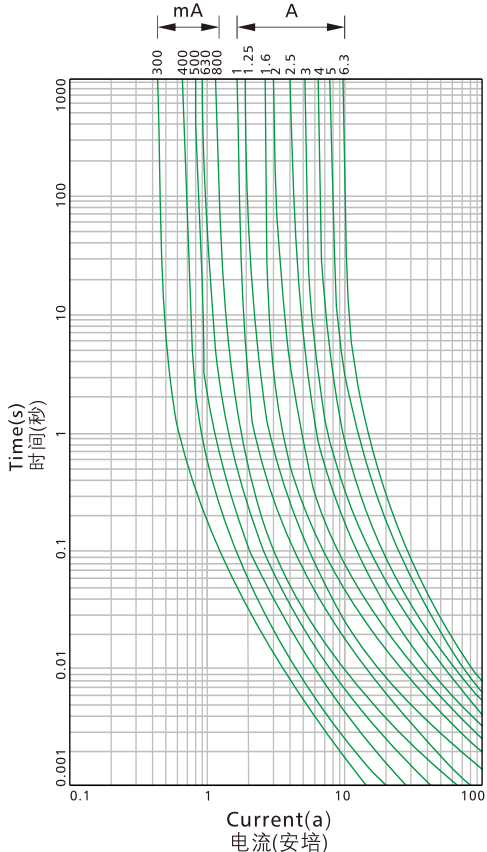

玻璃保险丝管(延时型)

Glass Tube Fuse (Time-Lag) 250V/125V

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² T Melting Integral (A ² .S)
3E0100A/BP	100mA	250V/125V	0.0042
3E0125A/BP	125mA	250V/125V	0.010
3E0160A/BP	160mA	250V/125V	0.025
3E0200A/BP	200mA	250V/125V	0.035
3E0250A/BP	250mA	250V/125V	0.056
3E0300A/BP	300mA	250V/125V	0.10
3E0315A/BP	315mA	250V/125V	0.12
3E0350A/BP	350mA	250V/125V	0.15
3E0400A/BP	400mA	250V/125V	0.25
3E0500A/BP	500mA	250V/125V	0.35
3E0630A/BP	630mA	250V/125V	0.55
3E0750A/BP	750mA	250V/125V	0.70
3E0800A/BP	800mA	250V/125V	1.1
3E1100A/BP	1A	250V/125V	2
3E1125A/BP	1.25A	250V/125V	3.8
3E1150A/BP	1.5A	250V/125V	4.2
3E1160A/BP	1.6A	250V/125V	6.2
3E1200A/BP	2A	250V/125V	13
3E1250A/BP	2.5A	250V/125V	18
3E1300A/BP	3A	250V/125V	28
3E1315A/BP	3.15A	250V/125V	32
3E1350A/BP	3.5A	250V/125V	39
3E1400A/BP	4A	250V/125V	43
3E1500A/BP	5A	250V/125V	58
3E1630A/BP	6.3A	250V/125V	81

目录编号: Catalog No.A:250V B:125V

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
	100mA~6.3A	E221465
	100mA~6.3A	E221465

额定分断能力:

Interrupting Rating:
50 Amperes at 125V AC
50 Amperes at 250V AC

测试标准:

Testing Standard: UL248-14

电气特性 Electrical Characteristics:

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min (大于4小时)
200%	60 s Max (小于60秒)
1000%	10 ms Min (大于10毫秒)