





3N $\Phi 3.6 \times 10$ RoHS Compliant




陶瓷保险丝管(延时型)

Ceramic Tube Fuse (Time-Lag) 250V

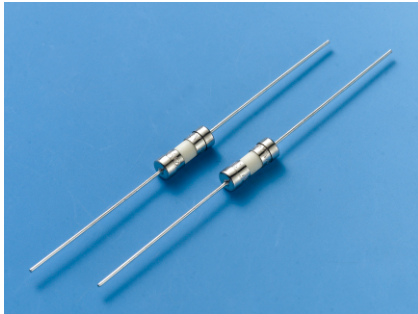

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ² T Melting Integral (A ² .S)
3N0500AP	500mA	250V	190	0.4
3N0630AP	630mA	250V	180	1.0
3N0800AP	800mA	250V	160	1.7
3N1100AP	1A	250V	140	2.0
3N1125AP	1.25A	250V	130	3.2
3N1160AP	1.6A	250V	120	11
3N1200AP	2A	250V	100	24
3N1250AP	2.5A	250V	100	40
3N1315AP	3.15A	250V	100	80
3N1400AP	4A	250V	100	94
3N1500AP	5A	250V	100	133
3N1630AP	6.3A	250V	100	180
3N1800AP	8A	250V	100	379
3N2100AP	10A	250V	100	620

Time-Current Characteristics
电流-时间曲线图

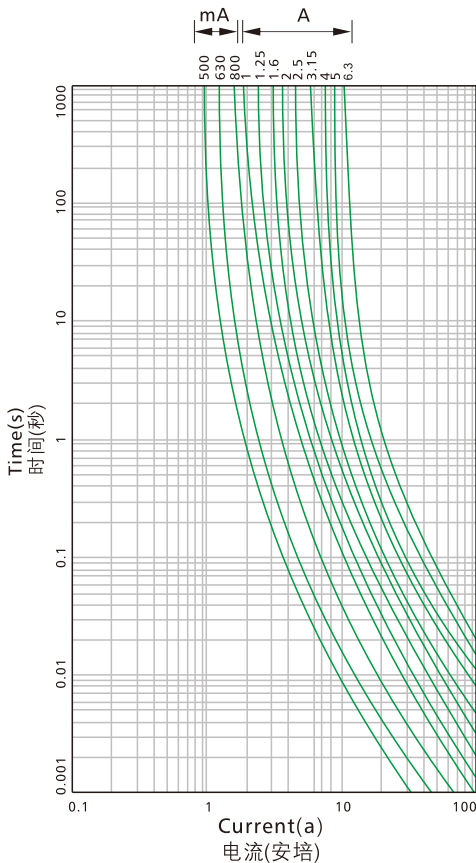

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
	100mA~10A	E221465
	500mA~6.3A	40016660
	500mA~6.3A	CQC05012014483

额定分断能力:

Interrupting Rating:

35A or 10In Whichever is greater

测试标准:

Testing Standard: IEC60127-3 GB9364-3

电气特性 Electrical Characteristics:

额定电流的% % of Ampere Rating	熔断时间 Opening Time
210%	2 min Max (小于2分钟)
275%	400 ms~10 s
400%	150 ms~3 s
1000%	20ms~150 ms