


5E $\Phi 5.2 \times 20$ RoHS Compliant




玻璃保险丝管(延时型)

Glass Tube Fuse (Time-Lag) 250V/125V

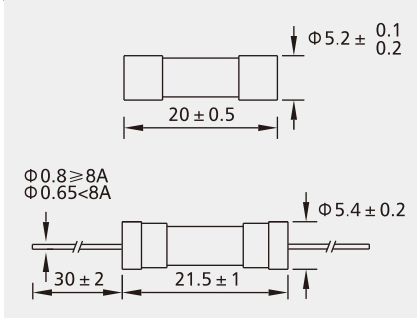

Time-Current Characteristics
电流-时间曲线图

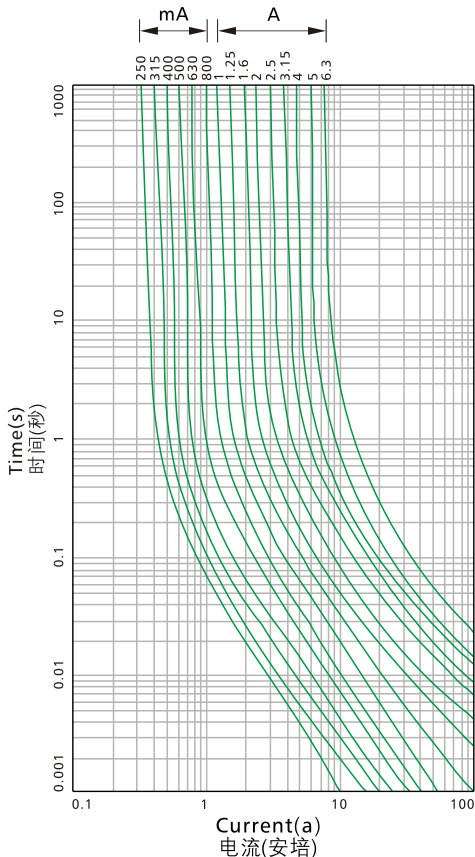

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	熔化热能 ² T Melting Integral (A ² .S)
5E0100A/B	100mA	250V/125V	0.005
5E0125A/B	125mA	250V/125V	0.01
5E0160A/B	160mA	250V/125V	0.02
5E0200A/B	200mA	250V/125V	0.04
5E0250A/B	250mA	250V/125V	0.06
5E0300A/B	300mA	250V/125V	0.08
5E0315A/B	315mA	250V/125V	0.10
5E0350A/B	350mA	250V/125V	0.13
5E0400A/B	400mA	250V/125V	0.19
5E0500A/B	500mA	250V/125V	0.32
5E0630A/B	630mA	250V/125V	0.54
5E0750A/B	750mA	250V/125V	0.93
5E0800A/B	800mA	250V/125V	1.16
5E1100A/B	1A	250V/125V	2.5
5E1125A/B	1.25A	250V/125V	4.2
5E1150A/B	1.5A	250V/125V	6.2
5E1160A/B	1.6A	250V/125V	11
5E1200A/B	2A	250V/125V	20
5E1250A/B	2.5A	250V/125V	39
5E1300A/B	3A	250V/125V	64
5E1315A/B	3.15A	250V/125V	69
5E1350A/B	3.5A	250V/125V	70
5E1400A/B	4A	250V/125V	83
5E1500A/B	5A	250V/125V	90
5E1600A/B	6A	250V/125V	102
5E1630A/B	6.3A	250V/125V	126

目录编号: Catalog No. A:250V B:125V

带引线产品目录编号后加 "P"

Suffix "P" for Lead Type After Catalog No.

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
	100mA~6.3A	E221465
	100mA~6.3A	E221465

额定分断能力:

Interrupting Rating:

10000 Amperes at 125V AC

35 Amperes at 250V AC(100mA~1A)

100 Amperes at 250V AC(1.25A~3.5A)

200 Amperes at 250V AC(4A~6.3A)

测试标准:

Testing Standard: UL248-14

电气特性 Electrical Characteristics:

额定电流的% % of Ampere Rating	熔断时间 Opening Time
100%	4 hours Min(大于4小时)
135%	1 hour Max(小于1小时)
200%	120 s Max (小于120秒)
1000%	10 ms Min (大于10毫秒)