


5N $\Phi 5.2 \times 20$ RoHS Compliant



陶瓷保险丝管(延时型)

Ceramic Tube Fuse (Time-Lag) 250V

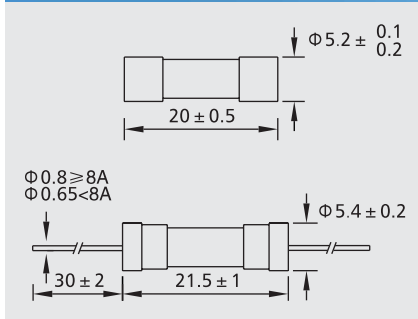


目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ² Melting Integral (A ² .S)
5N1100A	1A	250V	350	1.2
5N1125A	1.25A	250V	300	2.5
5N1160A	1.6A	250V	200	3.6
5N1200A	2A	250V	190	7.6
5N1250A	2.5A	250V	180	13
5N1315A	3.15A	250V	140	25
5N1400A	4A	250V	100	40
5N1500A	5A	250V	100	67
5N1630A	6.3A	250V	100	110

带引线产品目录编号后加 "P"

Suffix "P" for Lead Type After Catalog No.

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
cRUUS	500mA~6.3A	E221465
DVE	1A~6.3A	40019482
CCCS	1A~6.3A	2004010207135720
S	1A~6.3A	1019590
K	1A~2.5A	SU05026-14001
K	3.15A~6.3A	SU05026-14002

Time-Current Characteristics
电流-时间曲线图

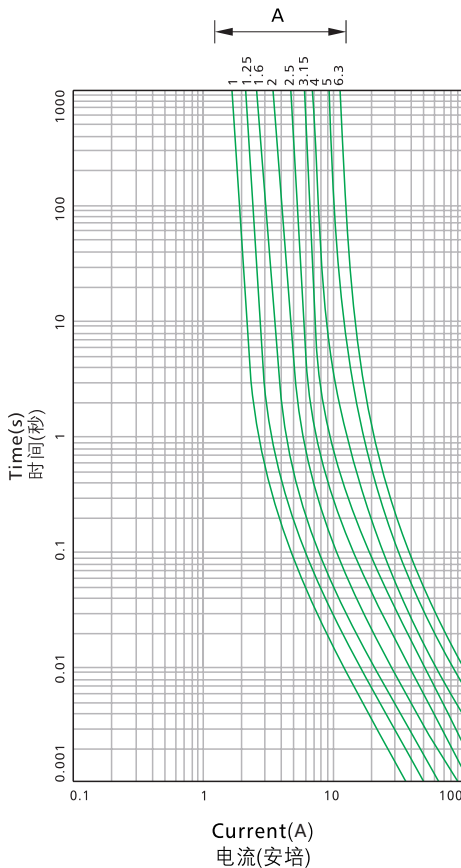

额定分断能力:

Interrupting Rating:

1500 Amperes at 250V AC

测试标准:

Testing Standard: IEC60127-2 GB9364-2

电气特性 Electrical Characteristics:

额定电流的% % of Ampere Rating	熔断时间 Opening Time (1A~3.15A)	熔断时间 Opening Time (4A~6.3A)
210%	30 min Max (小于30分钟)	30 min Max (小于30分钟)
275%	750ms~80s	750 ms~80 s
400%	95ms~5s	150 ms~5 s
1000%	10ms~150ms	20 ms~150 ms