




5M $\Phi 5.2 \times 20$ RoHS Compliant



陶瓷保险丝管(快断型)

Ceramic Tube Fuse (Fast-Acting) 250V

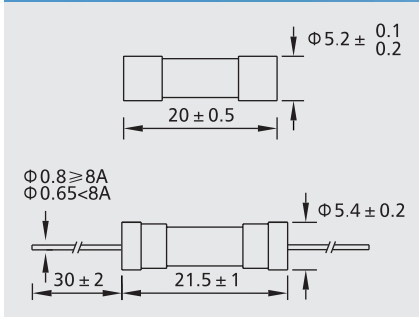


目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	最大电压降(mv) Max Voltage Drop	熔化热能 ² T Melting Integral (A ² .S)
5M0500A	500mA	250V	1800	0.2
5M0630A	630mA	250V	1500	0.3
5M0800A	800mA	250V	1200	0.4
5M1100A	1A	250V	1000	0.6
5M1125A	1.25A	250V	800	0.8
5M1160A	1.6A	250V	600	1.2
5M1200A	2A	250V	500	3.4
5M1250A	2.5A	250V	400	7.2
5M1315A	3.15A	250V	350	9.2
5M1400A	4A	250V	300	14
5M1500A	5A	250V	250	25
5M1630A	6.3A	250V	200	64

带引线产品目录编号后加 "P"

Suffix "P" for Lead Type After Catalog No.

认证 Approvals	电流范围 Ampere Range	证书号 Certificate No.
	250mA~6.3A	E221465
	500mA~6.3A	40016332
	500mA~6.3A	2005010207153251
	500mA~800mA	SU05026-15001
	1A~2.5A	SU05026-15003
	3.15A~6.3A	SU05026-15002

Time-Current Characteristics
电流-时间曲线图

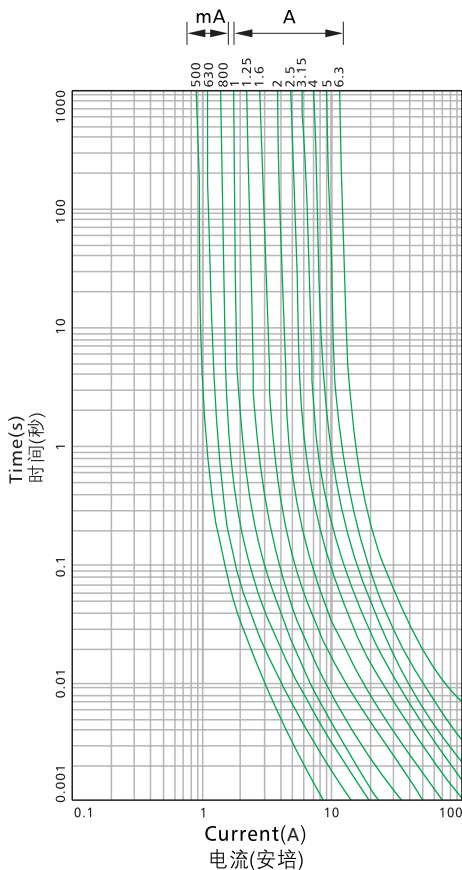

额定分断能力:

Interrupting Rating:

1500 Amperes at 250V AC

测试标准:

Testing Standard: IEC60127-2 GB9364-2

电气特性 Electrical Characteristics:

额定电流的% % of Ampere Rating	熔断时间 Opening Time (500mA~3.15A)	熔断时间 Opening Time (4A~6.3A)
210%	30 min Max(小于30分钟)	30 min Max(小于30分钟)
275%	10 ms~2 s	10 ms~3 s
400%	3 ms~300 ms	3 ms~300 ms
1000%	20 ms Max(小于20毫秒)	20 ms Max(小于20毫秒)