





12H RoHS Compliant




贴片保险丝(抗浪涌型)

SMD Fuse (High Inrush Current Withstand) 63V/32V

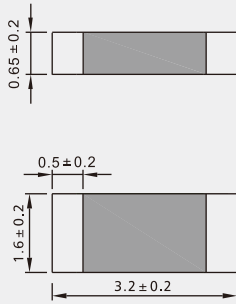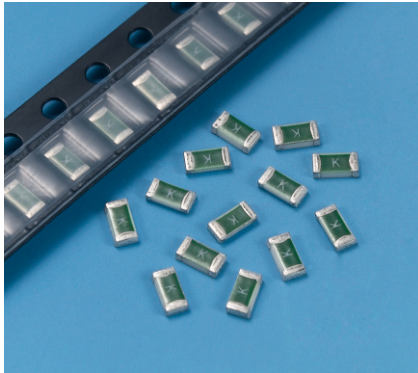

Time-Current Characteristics
电流-时间曲线图

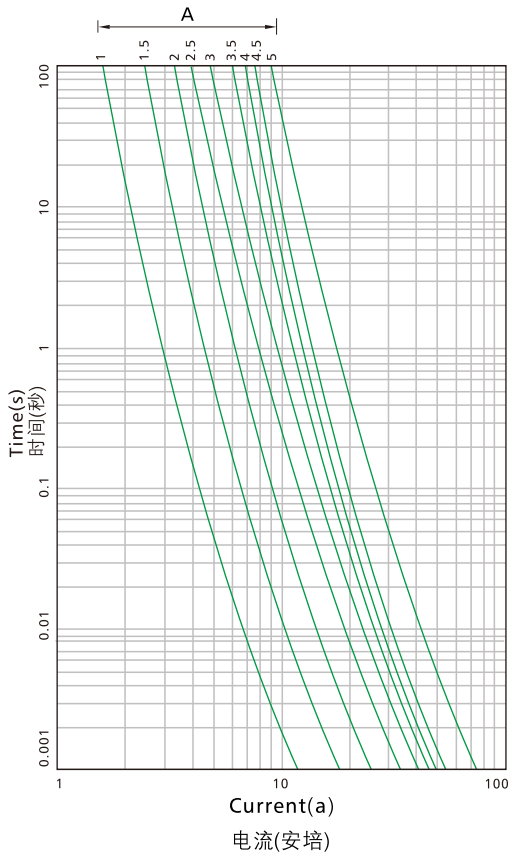

| 目录编号 Catalog No. | 额定电流 Ampere Rating | 额定电压 Voltage Rating | 标示 Making | 熔化热能 ² T Melting Integral (A ² .S) |
|---------------------|-----------------------|------------------------|--------------|---|
| 12H1100C | 1A | 63V | H | 0.16 |
| 12H1150C | 1.5A | 63V | K | 0.40 |
| 12H1200C | 2A | 63V | N | 1.07 |
| 12H1250C | 2.5A | 63V | O | 1.61 |
| 12H1300C | 3A | 63V | P | 2.02 |
| 12H1350C | 3.5A | 63V | R | 2.55 |
| 12H1400C | 4A | 63V | S | 3.07 |
| 12H1500D | 5A | 32V | T | 5.2 |

| 认证 Approvals | 电流范围 Ampere Range | 证书号 Certificate No. |
|--------------|-------------------|---------------------|
| | 1A~5A | E221465 |

额定分断能力:

Interrupting Rating:

50 Amperes at 63V DC(1A~4A)

100 Amperes at 32V DC(5A)

电气特性 Electrical Characteristics:

| 额定电流 Ampere Rating | 额定电流的% % of Ampere Rating | 熔断时间 Opening Time |
|-----------------------|------------------------------|----------------------|
| 1A~5A | 100% | 4 hours Min(大于4小时) |
| 1A~5A | 250% | 5 s Max(小于5秒) |
| 1A~5A | 300% | 0.1 s ~ 3 s |
| 1A~5A | 1000% | 0.2 ms ~ 20 ms |

工作温度 Operating Temperature

-40°C~+125°C

材料 Materials

Substrate:ceramic/glass cover

Termination:sliver over-plated with nickel and tin

Element:silver

焊接方法 Soldering Method

Solder reflow:260°C,10 s max.

包装 Packaging

Automaton taped 3000PCS per reel,30000PCS per carton.